


Four Contact thin section ball bearing


 洛阳盟拓轴承科技有限公司
 Louyang Monton Bearing Science&Technology Co.Ltd.

Sealed Type Four Contact thin section ball bearing

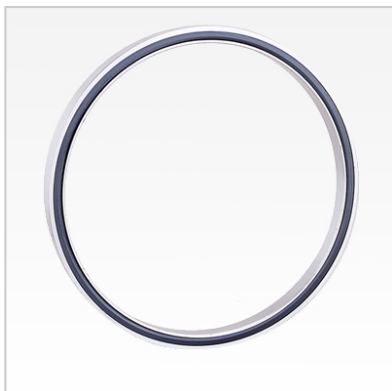

Bearing Number	Dimensions in Inches				Capacities [lbs]						Limit Speed [RPM]	Limit Torque [in-oz]	Weight [lbs]
	Bore	Outside Dia.	L1	L2	Radial		axial		Torque [in-lbs]				
					Dynamic	Static	Dynamic	Static	Dynamic	Static			
JG400 XP0	40.000	42.000	40.554	41.602	67.310	24332	168300	45770	138000	374256	50	440	30.8
JG350 XP0	35.000	37.000	35.554	36.602	59.100	22845	147700	41970	1.064.000	308.527	55	339	27.1
JG300 XP0	30.000	32.000	30.554	31.602	50.890	21200	127200	37980	788.800	246.541	60	252	23.3
JG250 XP0	25.000	27.000	25.554	26.602	42.680	19360	106700	33780	554.900	188.838	75	177	19.5
JG220 XP0	22.000	24.000	22.554	23.602	37.760	18.152	94.390	31.130	434.200	156.625	80	138	16.8
JG200 XP0	20.000	22.000	20.554	21.602	34.470	17.293	86.180	29.300	362.000	136.238	90	115	15.8
JG180 XP0	18.000	20.000	18.554	19.602	31.190	16.386	77.980	27.410	296.300	116.793	100	95	13.7
JG160 XP0	16.000	18.000	16.554	17.602	27.910	15.425	69.770	25.450	237.200	98.373	110	76	12.3
JG140 XP0	14.000	16.000	14.554	15.602	24.620	14.404	61.560	34.410	184.700	81.056	125	59	10.8
JG120 XP0	12.000	14.000	12.554	13.602	21.340	13.315	53.350	21.280	138.700	64.935	140	44	9.3
JG110 XP0	11.000	13.000	11.554	12.602	19.700	12.739	49.250	20.180	118.200	57.347	160	38	8.6
JG100 XP0	10.000	12.000	10.554	11.602	18.060	12.147	45.140	19.040	99.320	50.124	175	32	7.9
JG090 XP0	9.000	11.000	9.554	10.602	16.420	11.526	41.040	17.870	82.080	43.240	190	26	7.2
JG080 XP0	8.000	10.000	8.554	9.602	14.770	10.882	36.940	16.650	66.480	36.743	210	21	6.5
JG075 XP0	7.500	9.500	8.054	9.102	13.680	10.410	34.200	15.820	58.140	33.196	225	19	6.1
JG070 XP0	7.000	9.000	7.554	8.602	13.130	10.208	32.830	15.400	52.530	30.636	240	17	5.8
JU120X	12.000	12.750	12.150	12.535	5.950	2.622	14.880	4.420	36.830	12.174	160	22.8	1.56

P0													
JU110X P0	11.000	11.750	11.150	11.535	5.470	2.496	13.680	4.180	31.110	10.651	180	19.2	1.43
JU100X P0	10.000	10.750	10.150	10.535	4.990	2.364	12.470	3.930	25.880	9.201	200	16.0	1.31
JU090X P0	9.000	9.750	9.150	9.535	4.510	2.226	11.270	3.670	21.130	7.830	220	13.0	1.18

Bearing Number	Dimensions in Inches				Capacities [lbs]						Limit Speed [RPM]	Limit Torque [in-oz]	Weight [lbs]
	Bore	Outside Dia.	L1	L2	Radial		axial		Torque [in-lbs]				
					Dynamic	Static	Dynamic	Static	Dynamic	Static			
JU080XP0	8.000	8.750	8.150	8.537	4.030	2.082	10.070	3.410	16.870	6.542	310	10.4	1.06
JU075XP0	7.500	8.250	7.650	8.037	3.790	2.007	9.470	3.270	14.910	5.930	330	9.2	0.99
JU070XP0	7.000	7.750	7.150	7.537	3.550	1.931	8.870	3.130	13.080	5.341	350	8.1	0.93
JU065XP0	6.500	7.250	6.650	7.037	3.310	1.851	8.270	2.990	11.370	4.775	380	7.0	0.87
JU060XP0	6.000	6.750	6.150	6.542	3.070	1.770	7.660	2.840	9.770	4.234	410	6.1	0.81
JU055XP0	5.500	6.250	5.650	6.042	2.830	1.687	7.060	2.690	8.300	3.717	450	5.1	0.74
JU050XP0	5.000	5.750	5.150	5.545	2.590	1.600	6.460	2.540	6.950	3.226	500	4.3	0.68
JU047XP0	4.750	5.500	4.900	5.295	2.460	1.556	6.160	2.460	6.320	2.991	520	3.9	0.65
JU045XP0	4.500	5.250	4.650	5.047	2.340	1.510	5.860	2.380	5.710	2.762	550	3.5	0.61
JU042XP0	4.250	5.000	4.400	4.797	2.220	1.464	5.560	2.290	5.140	2.541	590	3.2	0.58
JU040XP0	4.000	4.750	4.150	4.547	2.100	1.417	5.260	2.210	4.600	2.326	620	2.9	0.55
JB065XP0	6.500	7.125	6.699	6.925	2.760	1.435	6.910	2.340	9.410	3.668	380	61	0.47
JB060XP0	6.000	6.625	6.1996	6.425	2.560	1.371	6.400	2.220	8.080	3.247	410	52	0.44
JB055XP0	5.500	6.125	5.699	5.925	2.360	1.304	5.890	2.100	6.850	2.844	450	44	0.40
JB050XP0	5.000	5.625	5.199	5.425	2.150	1.236	5.380	1.980	5.720	2.463	500	36	0.37
JB047XP0	4.750	5.375	4.949	5.175	2.030	1.193	5.080	1.900	5.140	2.265	520	32	0.35
JB045XP0	4.500	5.125	4.699	4.925	1.950	1.165	4.880	1.850	4.690	2.103	550	28	0.34
JB042XP0	4.250	4.875	4.449	4.675	1.830	1.120	4.570	1.780	4.170	1.917	590	24	0.31
JB040XP0	4.000	4.625	4.199	4.425	1.750	1.091	4.370	1.720	3.770	1.764	620	20	0.30
JB035XP0	3.500	4.125	3.699	3.925	1.540	1.014	3.860	1.590	2.940	1.450	710	16	0.27

Bearing Number	Dimensions in Inches				Capacities [lbs]						Limit Speed [RPM]	Limit Torque [in-oz]	Weight [lbs]
	Bore	Outside Dia.	L1	L2	Radial		axial		Torque [in-lbs]				
					Dynamic	Static	Dynamic	Static	Dynamic	Static			
JB030XP0	3.000	3.625	3.199	3.425	1.340	933	3.350	1.440	2.220	1.159	1.000	12	0.22
JB025XP0	2.500	3.125	2.699	2.925	1.140	848	2.840	1.290	1.600	895	1.200	8	0.19
JB020XP0	2.000	2.625	2.199	2.425	930	758	2.340	1.130	1.080	658	1.500	6	0.15
JA065XP0	6.500	7.000	6.648	6.856	2.050	1.001	5.120	1.650	6.910	2.535	300	61	0.30
JA060XP0	6.000	6.500	6.148	6.356	1.900	955	4.740	1.570	5.930	2.240	330	52	0.28
JA055XP0	5.500	6.000	5.648	5.856	1.750	908	4.360	1.480	5.020	1.959	450	44	0.25
JA050XP0	5.000	5.500	5.148	5.356	1.590	859	3.980	1.400	4.180	1.693	500	36	0.23
JA047XP0	4.750	5.250	4.898	5.106	1.520	834	3.790	1.350	3.790	1.565	520	32	0.22
JA045XP0	4.500	5.000	4.648	4.856	1.440	809	3.600	1.310	3.420	1.441	550	28	0.21
JA042XP0	4.250	4.750	4.398	4.606	1.370	783	3.410	1.260	3.070	1.321	580	24	0.20
JA040XP0	4.000	4.500	4.148	4.356	1.290	756	3.220	1.210	2.740	1.205	620	20	0.19
JA035XP0	3.500	4.000	3.648	3.856	1.140	701	2.850	1.110	2.130	986	710	16	0.17
JA030XP0	3.000	3.500	3.148	3.356	990	643	2.470	1.010	1.600	785	830	12	0.14
JA025XP0	2.500	3.000	2.648	2.856	830	583	2.090	910	1.150	601	1.200	8	0.12
JA020XP0	2.000	2.500	2.148	2.356	680	514	1.710	790	770	434	1.500	6	0.10
JHA17XL0	1.750	2.125	1.858	2.024	460	319	1.140	500	440	232	1.710	6	0.060
JHA15XL0	1.500	1.875	1.608	1.774	400	296	1.000	460	340	187	2.000	5	0.052
JHA10XL0	1.000	1.375	1.108	1.274	290	247	730	370	170	110	3.000	5	0.035