

## Tandem Bearings

### Tandem Bearings for Extruder Gearboxes-



|             |              |
|-------------|--------------|
| BEARING NO. | F-81683.T4AR |
|-------------|--------------|

|            |  |
|------------|--|
| Dimensions |  |
|------------|--|

|   |    |
|---|----|
| d | 25 |
|---|----|

|   |     |
|---|-----|
| D | 100 |
|---|-----|

|   |     |
|---|-----|
| H | 149 |
|---|-----|

|      |   |
|------|---|
| Rows | 4 |
|------|---|


|                  |  |
|------------------|--|
| Load Rating (KN) |  |
|------------------|--|

|   |     |
|---|-----|
| C | 350 |
|---|-----|

|    |      |
|----|------|
| CO | 1400 |
|----|------|

|        |  |
|--------|--|
| weight |  |
|--------|--|

|    |      |
|----|------|
| KG | 6.22 |
|----|------|

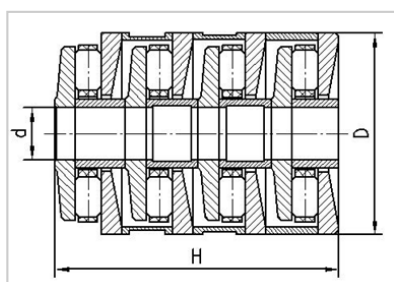

Plastic pellet extruder bearings are based on high-quality materials, combined with advanced design and precision manufacturing technology, showing excellent performance such as high load bearing, low friction, and long life. Its low noise and high precision characteristics are suitable for heavy machinery such as extruders, and are widely used in many fields such as automobiles, aviation, and machinery manufacturing.