


ZKLF ZKLN Double Direction Axial Angular Contact Ball Bearings

ZKLF Axial angular contact ball bearings-ZKLF1762-2RS-2AP

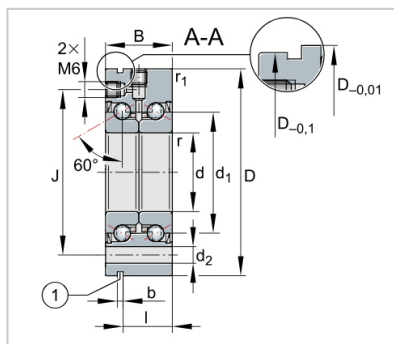

Designation	ZKLF1762-2RS-2AP
Mass $m = \text{kg}$	0.9
Dimensions	
d -0,005	17
D -0,01	62
B -0,25	50
d1	30
r min.	0.3
r1 min.	0.6
J	48
d2	6.8
b	3
l	42
Pitch $n \times t$	$6 \times 60^\circ$
Mounting dimensions	
Da max.	37
da min.	23
t1	0.1
Fixing screws	DIN EN ISO 4762 10.9
Size	M6 $\times$ 60
$n \times t_a$	$6 \times 60^\circ$
Basic load ratings axial	
dyn. Ca N	33500
stat. C0a N	62000
Fatigue limit load Cu	3700
N	
Limiting speed n_G	7600
grease min-1	
Thermally safe	3300
operating speed n_P	
min-1	
Bearing frictional torque	0.36
MR Nm	
Rigidity axial caL N/ μm	800
Tilting rigidity ckL	200
Mass moment of inertia	0.264
Mm	
Axial runout μm	2
Recommended INA precision locknut	
For radial locking	ZM17
For axial locking	AM17
Tightening torque MA	15
Nm	
Required locknut force	7514
axial N	