


Crossed Roller Bearing

CRBF full completement crossed roller bearings-115

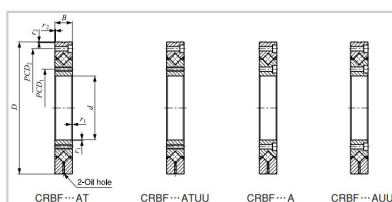

Boundary dimensions mm

d	115
r 2min	CRBF11528AD
r 1min	CRBF11528ADUU
B	115
D	240

Identification number

Sealed Type	28
Open Type	1.5
Shaft dia. mm	1.5
Mass (Ref.) kg	139
Basic static load rating C 0 N	12-M8 through 12- ϕ 9 through ϕ 14 counter bore de

Basic dynamic load rating C N

217

Mounting dimensions mm

Da	12- ϕ 9 through ϕ 14 counter bore depth 13.5
----	--

d a 162

Mounting holes mm

PCD1	198
Inner ring Mounting holes	84300
PCD2	138000
Outer ring Mounting holes	6.63

CRBF Super Slim Crossed Roller Bearings with mounting hole have an ultra-slim 5 mm bearing width□it's easy bolt-on mounting eliminates complex mounting procedures.Mounting Holed Type Super Slim Crossed Roller Bearings can be mounted directly to the mounting surface. No housing or pressure plate required.

CRBF Super Slim Crossed Roller Bearings with mounting hole have an ultra-slim 5 mm bearing width□it's easy bolt-on mounting eliminates complex mounting procedures.

Mounting Holed Type Super Slim Crossed Roller Bearings can be mounted directly to the mounting surface. No housing or pressure plate required.



Mounting:

The shoulder height diameters (d_a and D_a) which are related to mounting must meet the values shown in the dimension tables. When used with a housing, it is recommended to use a slight interference fit adjusted to the actual measured dimensions of the outer and inner ring. In addition, the depth of the housing bore is recommended to be equal to or larger than the bearing width. Mounting Holed Type Super Slim Crossed Roller Bearings have a plug hole for inserting cylindrical rollers. When mounting the bearings, position the plug away from the maximum load. The plug is located by the pin on the side.